Secure remote and local access in a single solution for the SMB environment

The Avocent® AutoView® 3050, AutoView 3100 and AutoView 3200 digital KVM appliances include access for one or two digital users and access for a local user in a single solution. The on-board Web interface provides secure, remote access designed for today's evolving SMB environment. The on-board Web interface lets you access target devices from any location. With this all-in-one solution, you can remotely manage all connected servers and serial-based devices from your desk or across town. The local port gives you convenient at-the-rack access. These solutions also include local PS/2 and USB peripheral support.

The AutoView 3050, AutoView 3100 and AutoView 3200 digital KVM offers LDAP user authentication, SSL-128 bit, DES, 3DES or AES communication, which are superior to industry standards. Other security features include 64 user accounts and an access control list for each user.
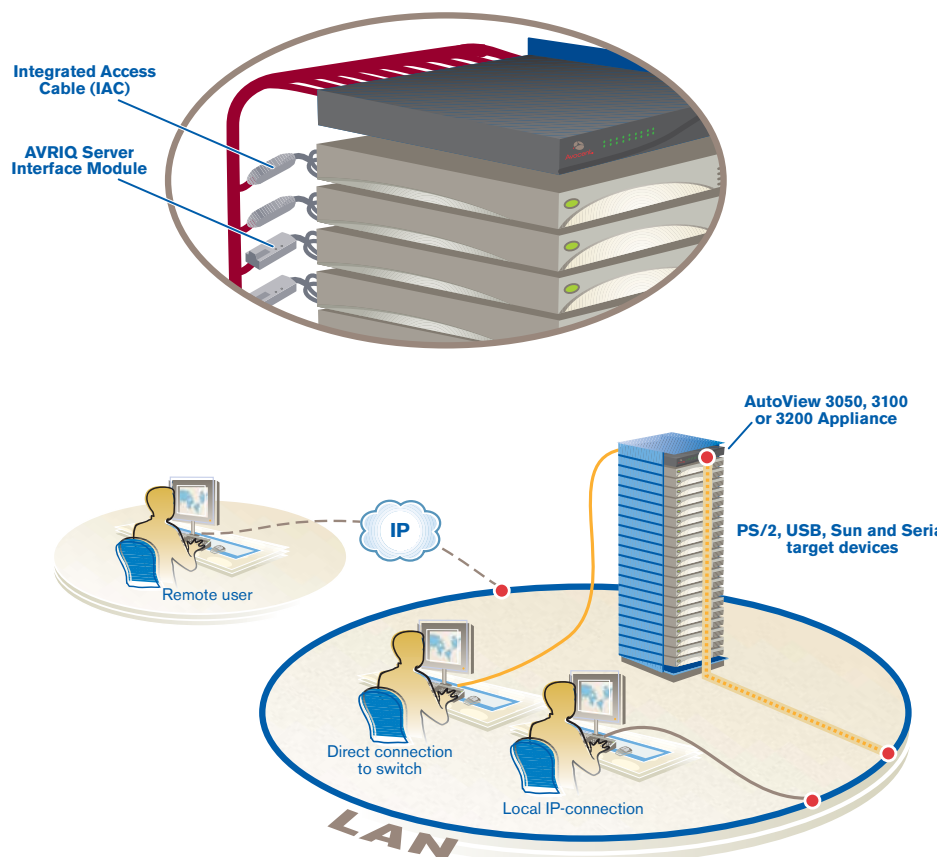
Benefits

- **Security.** LDAP authentication and encrypted IP communication between the user's browser and switch can be SSL-128 bit, DES, 3DES or AES.
- **On-board Web Interface.** No need to load and manage another software program on the users PC.
- **Access.** One or two digital paths let you remotely manage all connected servers and serial-based devices. A local port provides at-the-rack access for a local analog user.
- **Multi-platform Support.** Local PS/2 and USB connections and multi-platform target devices, including PS/2, USB, Sun and serial support.
- **IPv6 Support.** Supports Internet Protocol Version 6.

The AutoView 3050, AutoView 3100 and AutoView 3200 digital KVM appliances provide secure access for one or two digital users and a local analog user in a single location.

Ordering Details

Part Number	Description
AV3050-001	AutoView 3050 Digital KVM appliance, one digital port with local port, 8 target devices
AV3100-001	AutoView 3100 Digital KVM appliance, one digital port with local port, 16 target devices
AV3200-001	AutoView 3200 Digital KVM appliance, two digital ports with local port, 16 target devices
PS2IAC-7	7' PS/2 CAT 5 integrated access cable
PS2IAC-10	10' PS/2 CAT 5 integrated access cable
PS2IAC-15	15' PS/2 CAT 5 integrated access cable
USBIAC-7	7' USB CAT 5 integrated access cable
USBIAC-10	10' USB CAT 5 integrated access cable
USBIAC-15	15' PS/2 CAT 5 integrated access cable

The AutoView 3050, 3100 and 3200 Digital Appliances let you securely access targeted devices from any location.

Integrated Access Cable (IAC)

AVRIQ Server Interface Module

AutoView 3050, 3100 or 3200 Appliance

PS/2, USB, Sun and Serial target devices

Remote user

IP

Direct connection to switch

Local IP-connection

LAN

Specifications

Mechanical

Size: 1.72" (4.37 cm)H, 17" (43.18 cm)W, 10.98" (27.98 cm)D
Weight: 7.3 lbs (3.31 Kg)
Style: Rack mount

Environmental

Operating Temperature: 32 to 104 F (0 to 40 C)
Storage Temperature: -4 to 158 F (-20 to 70 C)

Power

Operating Voltage: 100-240 VAC
Power Frequency: 50-60 Hz autosensing
Input: 40 W maximum

Supported Hardware

Computers: PS/2, Sun, USB
Monitors: VGA, SVGA (XGA, XGA-II with adaptor), Maximum Local Port: 1600x1200, Maximum Remote Port using a DSRIQ module: 1280x1024 @ 75 Hz
Peripherals: USB keyboard and mouse, PS/2 keyboard, PS/2 mouse, IntelliMouse

Standards

Approved Agency:
UL, FCC, cUL, ICES-003, CE, GS, VCCI, MIC, C-Tick, GOST

Warranty

Two Year

HETEC Datensysteme GmbH
Landsberger Straße 65
D-82110 Germering, Germany
Tel.: +49 (0)89 - 89 43 67 - 0
Fax: +49 (0)89 - 89 43 67 - 99
Email: info@hetec.de
Web: www.hetec.de